


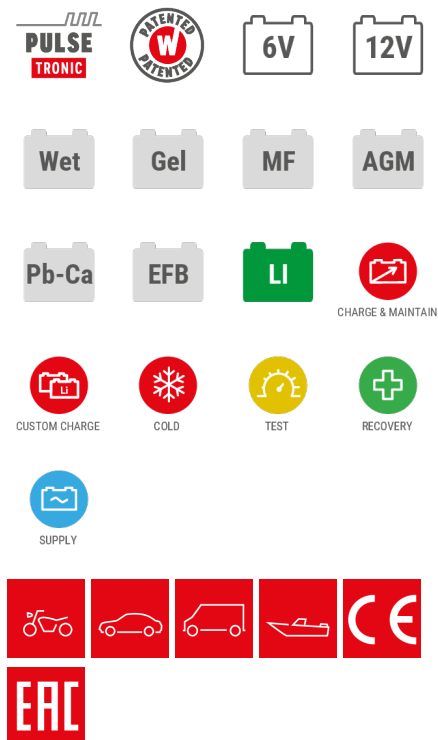

- Multi-functional electronic battery charger, maintainer and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 6/12V batteries with LCD screen.
- Automatic charging and maintenance in Pulse Tronic based on the technology of the selected battery.
- Advanced functions: COLD for charging and maintenance of batteries at low temperatures; TEST alternator, cranking and charging status of the battery; RECOVERY to recover sulphated batteries; SUPPLY for continuous and reliable power supply during battery changes.
- IP65 level ensures protection against dust, water and humidity. Compact and lightweight, for easy transport and positioning.
- Safety guaranteed by protection against overcharging, short circuit and pole inversion.
- Cable with clamps and cable with eyelets.

TECHNICAL DATA

CODE	807578	CHARGING VOLTAGE	6 / 12 V	MAX.RATED REFERENCE CAPAC.	70 Ah
SINGLEPHASE MAINS VOLTAGE	230 V	EFFICIENT CHARGING CURRENT	1 / 4 A	PROTECTION DEGREE	IP65
MAINS FREQUENCY	50 / 60 Hz	RATED CHAR.CUR.EN60335-2-29	1 / 4 A	DIMENSIONS (LxWxH)	3,5 x 17 x 6,5 cm
CHARGING ABSORBED POWER	55 W	MIN.RATED REFERENCE CAPAC.	2 Ah	WEIGHT	0,6 kg

SUPPLIED ACCESSORIES

125017	EYELETS PATCH CORD
125018	CLAMPS PATCH CORD

OPTIONAL ACCESSORIES

OTHER CHARGING/STARTING ACCESS

802986	BATTERY CONNECTOR WITH EYELETS M6
804037	BATTERY CONNECTOR WITH EYELETS M8
804038	CONNECTOR WITH CAR AND MOTORBIKE 12V CIGARETTE LIGHTER PLUG

DESCRIPTION

Multi-functional electronic battery charger, maintainer and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 6/12V batteries with LCD screen.

Charging and maintenance programs in Pulse Tronic dedicated to the technology of the selected battery. Advanced function for charging and maintenance of batteries at low temperatures. Activation of the RECOVERY function enables resetting of sulphated batteries. Tests the vehicle alternator and battery. Continuous and reliable power supply source during battery changes. Simplified use and immediate display of the parameters thanks to the LCD screen.

Features:

- Automatic charging and maintenance in Pulse Tronic based on the technology of the selected battery;
- COLD function for charging and maintenance of batteries at low temperatures;
- RECOVERY function to recover sulphated batteries;
- TEST function for battery, start-up and alternator;
- SUPPLY function for stable power supply during battery changing;
- LCD screen;
- Protection against overloads, short circuit and polarity reversal.

Complete with cable with clamps and cable with eyelets.

DOWNLOAD



CATALOG IMAGE



INSTRUCTION MANUAL



BROCHURE



CERTIFICATE

USEFUL LINKS



VIDEO