


COMBI WELD 200MF



Features:

- Latest IGBT Multi Process Inverter Power Source
- Digital Volt / Amp Display
- 4 Roll Wire Feed System
- Suitable for 0.6, 0.8 & 1.0mm Wire
- Will Accept 5 Kilogram Reel's
- Suitable for 1.6 - 4mm MMA Electrodes
- VRD Safety Device
- Portable
- Generator Friendly
- Easy Set Up & Operation

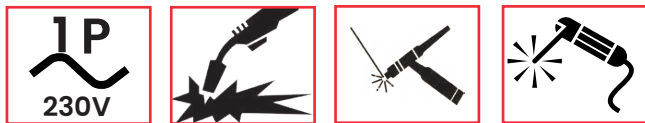

Functions:

- MIG/ MAG
- MMA
- TIG AC/DC HF/LIFT
- 2T/4T
- Burn Back Adjustment
- Variable Inductance
- Pre/Post Flow Gas Adjustment
- Up/Down Slope Adjustment
- AC Frequency Control
- AC Balance Control
- Start & End Current Adjustment
- Pulse Function
- Pulse Frequency Control
- Hot Start
- Arc Force
- Job Save Function

Package includes:

- Combi Weld Power Source
- M2-4 Mtr MIG Welding Torch
- Parker DGT26FX-12 TIG Welding Torch
- Earth Return Lead & Clamp
- Gas Hose
- 3 Mtr MMA Lead
- Foot Pedal
- 16A Plug



TECHNICAL SPECIFICATIONS	
Input Voltage	1P-230 (+ - 15%) 50/60Hz
Input Current	16 (A)
Current Range MIG	40-200 (A)
Current Range TIG	5-200 (A)
Current Range MMA	20-200 (A)
Duty Cycle MIG @ 40°C	200A @ 40%
Duty Cycle TIG @ 40°C	200A @ 40%
Duty Cycle MMA @ 40°C	200A @ 40%
Wire Speed (m/min)	2-16
Efficiency (%)	80
Power Factor @ 100%	0.73
Protection / Insulation Class	IP21/F
Cooling	Fan
Dimensions (mm)	750 x 375 x 725
Weight (Kg)	40
Conforms to	 EN IEC 60974-1: 2022 + A11: 2022 EN IEC 60974-10: 2021
Conforms to	 BS EN IEC 60974-1: 2022 + A11: 2022 BS EN IEC 60974-10: 2021

*See warranty form for terms and conditions